

# HYUNDAI

## IR Dome IP Camera



# 5MP H265/H264 Vandal-proof IR Dome IP

Model: HY-IP54VP30IR-VF



### Features:

- 1/3" UHD OmniBSI-2 CMOS sensor
- Max. 5MP resolution 2592 x 1944 output
- low illumination 0.1Lux
- Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- D-WDR, Motion Detection, Privacy Mask, Mirror, rotate
- RTSP and Onvif 2.4 compatible
- H.265/H.264 dual-stream media server
- Easy-to-use P2P Cloud service
- Multi web browser, PC Client, mobile APP remote access
- Optional customization Lens/Audio/POE, etc.
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 18 pcs new array IR Leds, IR distance 20-30 meters
- HD 2.8 – 12 mm VF lens

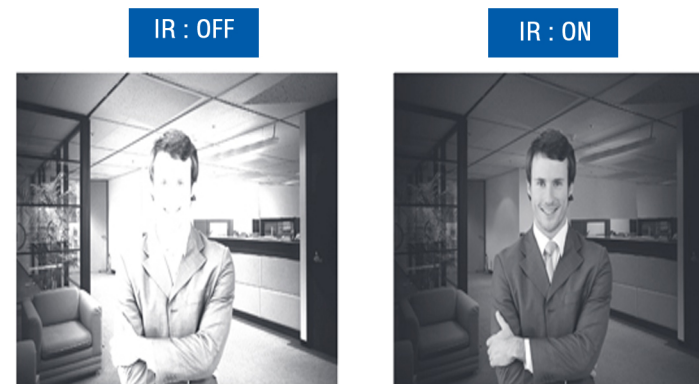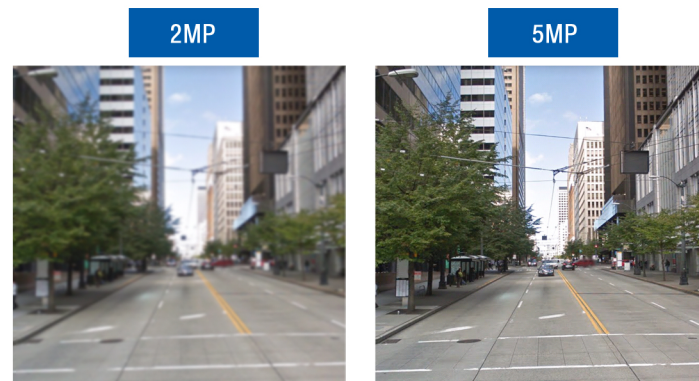

### Specification:

<b>Model</b>	<b>HY-IP54VP30IR-VF</b>
<b>Camera</b>	
Image Sensor	1/3" OV4689 CMOS
Effective Pixels	2688(H)×1520 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.1Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto
AGC/BLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror, Rotate
<b>Encode</b>	
Embedded Solution	Hi3516D
Video Standard	H.265/H.264
Video Resolution	Main Stream: 15fps@5MP(2592x1944),25fps@4MP(2592x1520),30fps@3MP/1080P/720P Sub Stream: VGA(640x480)/360P/QVGA@25fps, etc.
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u
OSD Overlay	Title and Time overlay
<b>IR Led</b>	
IR Led	18 pcs new array IR Leds
IR Distance	20-30 M
<b>Lens</b>	
Focal length	2.8 – 12 mm VF lens
<b>Optional Function</b>	
POE, Audio, etc.	
<b>Network Services</b>	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	2.4 compatible
<b>General</b>	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

### Deminsion:

