


HYUNDAI

32 CH NVR

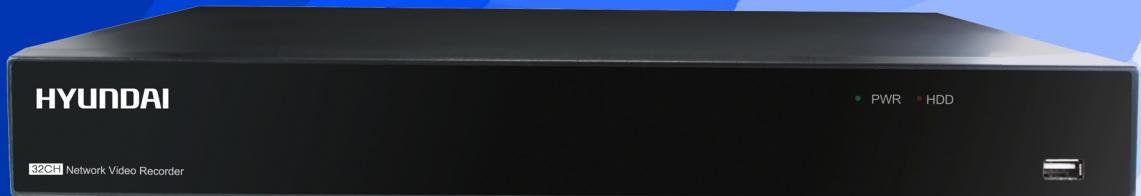

Model: HY-XP32H86

- 8MP(4K), 5MP, 3MP, 2MP(1080P), 1.3MP(960P), 1.0MP(720P) real time recording;
- Max 20 ch playback synchronously
- Onboard 8 SATA ports, each supports 6 TB
- Built-in high-power switching power supply
- Alarm audio and talk-back supported
- ONVIF 2.4 supported and compatible with almost all third-party IP cameras
- Up to 8 Mega pixels IP camera recording
- PTZ control via USB Mouse
- VGA, HDMI® and CVBS output sync
- HDMI® and VGA resolution up to 1920×1080P
- Built-in P2P Cloud service, firewall penetration automatically
- Always online, no need configuration for remote view anymore
- Mass of network protocols NTP, SADP (Camera Auto Discovery), Email, RTSP, UPNP
- Support iPhone, Android, Windows Mobile Phone, BlackBerry and Symbian APPs
- Internet Explorer, Chrome, Firefox, Safari and center monitoring client supported

Specification:

Model	HY-XP32H86
Recording Bandwidth	Max 320Mbps
Recording Resolution	8MP (4K), 5MP, 3MP, 2MP(1080P), 1.3MP(960P), 1.0MP(720P)
Display Split	1/4/6/8/9/10/13/14/16/17/19/22/25/32/36
live/Playback performance	4K: 4ch realtime 4MP: 8ch realtime 3MP: 10ch realtime 2MP: 20ch realtime
Output Interface	1 HDMI (up to 4K), 1 VGA
Display Resolution	1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080, 1680*1050, 1600*1200, 1900*1200, 2560*1440, 3840*2160
Alarm Input/out	16ch in / 4ch out
Ethernet	RJ-45 port (1000M)
Smart Phone	iOS, Android
Internal HDD	8 SATA HDDs, each HDD up to 6TB
RS485	yes
e-Sata	yes
Line In	yes
USB	1x3.0 USB for backup/upgrade, 2x 2.0 USB for mouse
ONVIF	yes
POE	NO
Power Supply	AC 100~240V
Dimension (W×D×H)	440*460*89mm